

HK510 Full Size Gasket RGB Tri-Mode Mechanical Keyboard



① Type-C

② BT

③ MAC WIN

④ Knob Function

Spin to knob to adjust the volume, press to mute

Sleep Mode&Bluetooth

Battery saving mode (First level)

Under wireless mode, the backlight turns off after 5 mins of inactivity.Press any key to exit sleep mode and connecting back bluetooth/2.4G

Deep sleep mode (Second level)

Enter deep mode after 30 mins of inactivity, turn off the light and disconnected.Press any key to exit sleep mode and connecting back bluetooth/2.4G

USB

Wired mode (switch to USB position):
Plug in the USB cable, i.e., wired connection

2.4G mode (switch to 2.4G position):

Plug in the receiver to enter 2.4G connection mode

Long press FN+R (pairing mode) green light blinks fast, short press to enter back-to-back mode green light blinks slowly, pairing is successful.The green light underneath the key returns to the normal light effect.

Bluetooth mode (switch to BT position):

Press FN+ Q / W / E keys respectively, Q / W / E keys (three connection channels).

① Press and hold FN+ Q (pairing mode), the blue light at the bottom of Q key will flash fast; press FN+ Q briefly (reconnect mode), the blue light at the bottom of Q key will flash slowly. If the connection is successful, the blue light at the bottom of the Q-key will be restored to the normal light effect.

② Press and hold FN+W (pairing mode), the light on the bottom of the W-key (blue light blinks fast); press and hold FN+W (reconnect mode), the light on the bottom of the W-key (blue light blinks slow). If the connection is successful, the blue light on the bottom of the W-key will return to the normal light effect.

③ Press and hold FN+E (pairing mode), the light on the bottom of the E-key (blue light blinks fast); press and hold FN+E (reconnect mode), the light on the bottom of the E-key (blue light blinks slow). If the connection is successful, the blue light on the bottom of the E-key will return to its normal light effect.

FN + ESC = Long press FN+ ESC for 3s, restore factory setting

FN + Print = 19 LED effect

FN + ← = Decrease LED speed

FN + → = Increase LED speed

FN + = LED color selection, total will be 8 colors

FN + WIN = Short press FN+ WIN win lock/win unlock)

Pairing Device (HK510)

Wired: HK510

Bluetooth: HK510 BT1

HK510 BT2

HK510 BT3

Can simultaneously switch different devices(mobile phone,computer,laptop), short press FN+Q/W/E/R to switch.
(For example: User can customize to use BT1 for connecting computer and BT2 for mobile phone
[Short press FN+W to use mobile phone/short press FN+Q to use computer])

Battery power indicator:

1. Press FN + Spacebutton to check the battery level, only work at 2.4G and BT mode

2. The battery level will be indicated by the backlight of keys "1" to "0". The number of keys lit up indicates the battery level percentage.

Only "1" is lit - 10%


"1" to "5" is lit - 50%

"1" to "0" is lit - 100%

Charging indicator:

When connect with cable, charging keyboard, FN key will be backlit with red.

If battery voltage is lower, FN will keep blinking red for notice.

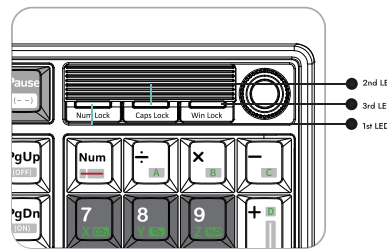

Indicator LED Definitions

Indicator LED	Function
1st LED	Num Lock indicator
2nd LED	Caps Lock indicator
3rd LED	Windows Lock indicator

Win	FN+F1 = Screen brightness-	FN+F8 = Play/Pause
	FN+F2 = Screen brightness+	FN+F9 = Next song
	FN+F3 = Windows task view	FN+F10 = Mute
	FN+F4 = Open file Explorer	FN+F11 = Volume-
	FN+F5 = LED brightness-	FN+F12 = Volume+
	FN+F6 = LED brightness+	FN+Esc(Long press 3s) = Restore factory setting
	FN+F7 = Previous song	FN+Win= Win lock

	F1 = Screen brightness-	F8 = Play/Pause
	F2 = Screen brightness+	F9 = Next song
	F3 = Mission Control	F10 = Mute
Mac	F4 = Launchpad	F11 = Volume-
	F5 = LED brightness-	F12 = Volume+
	F6 = LED brightness+	FN+Esc(Long press 3s) = Restore factory setting
	F7 = Previous song	



HK510
Gaming Keyboard