

普通书纸, A4大小, 双面印刷, 对折




HC310

Series User Manual


1 Left Side Panel Removal

Unscrew the two screws securing the side panel at point a, then slide the panel in the direction of the arrow to remove it.

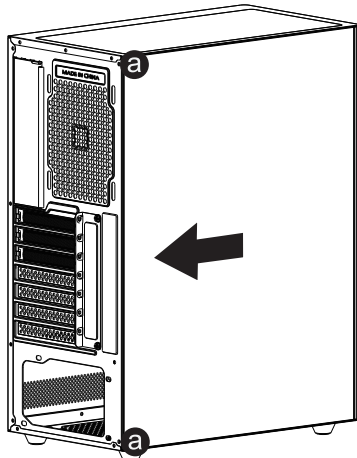


2 Magnetic Cable Cover Removal

Place your fingers into the finger grip area, pull outward in the direction of the arrow to create a gap, then lift upward to remove the cover.

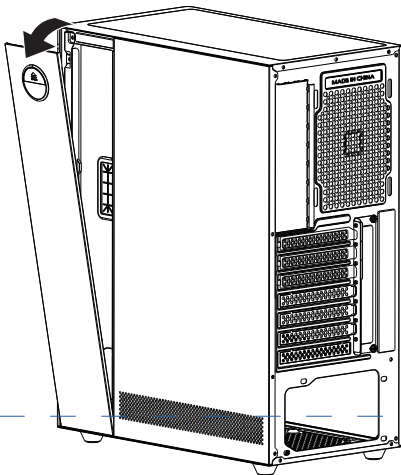


3 Motherboard Installation

Align the motherboard with the chassis mounting holes and secure it with screws as shown (supports ATX/Micro ATX/ITX motherboards).
(Note: Motherboards vary in installation requirements; pls referto the usuer manual of motherboard's manual for guidance.)

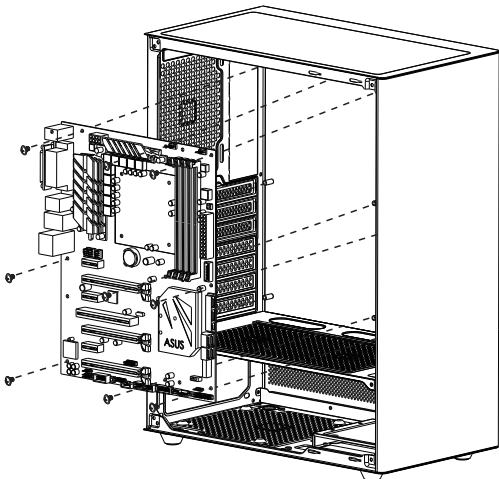


4 Power Supply Installation (Supports ATX Standard PSU)


Place the power supply into the designated position and secure it with four screws at point a.

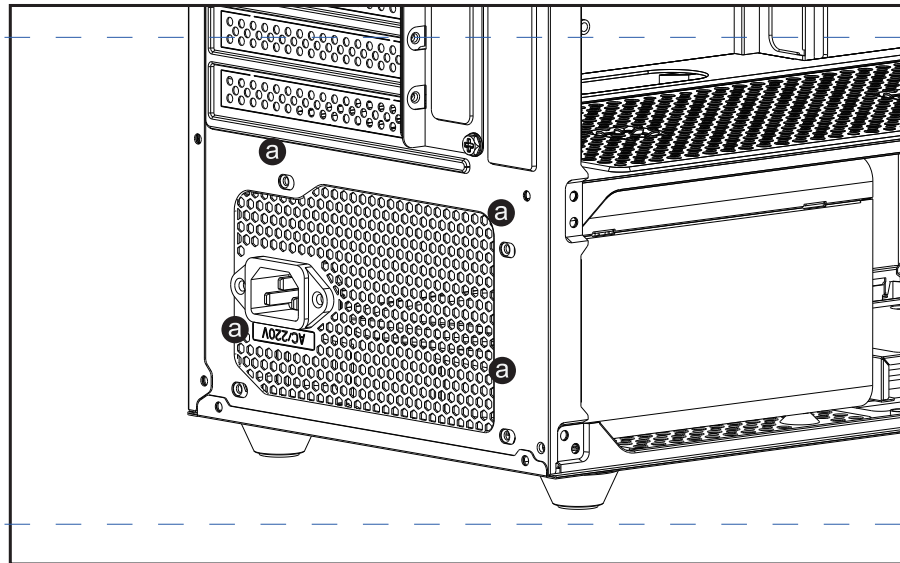

5 Graphics Card Installation

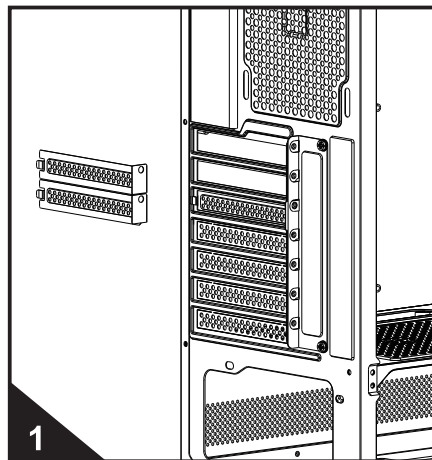


1 Remove the PCI slot cover screw(s) corresponding to your motherboard's PCIe slot and detach the cover.

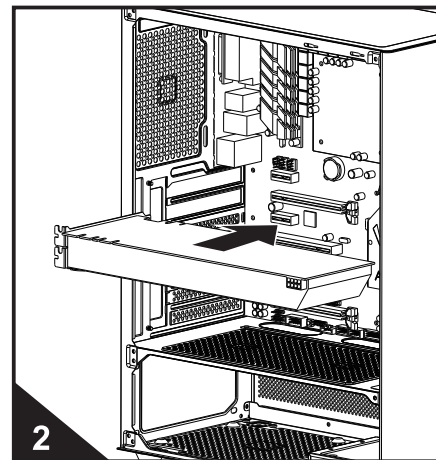


2 Insert the graphics card into the PCIe slot in the direction of the arrow and secure it with screws.

6 Drive Installation (Supports: 1 HDD + 2 SSDs)

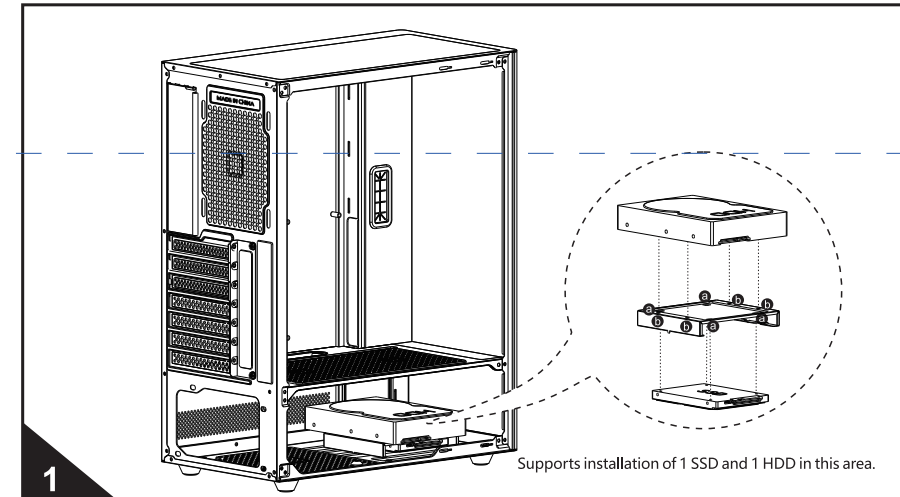

- 1 Remove the drive cage from the chassis base.
- 2 Mount a 2.5-inch SSD into the drive cage as shown, securing it with four screws at point a. Then, mount a 3.5-inch HDD onto the drive cage as shown, securing it with four screws at point b.
- 3 Reinstall the drive cage into the chassis base slot and secure it with screws from the bottom.

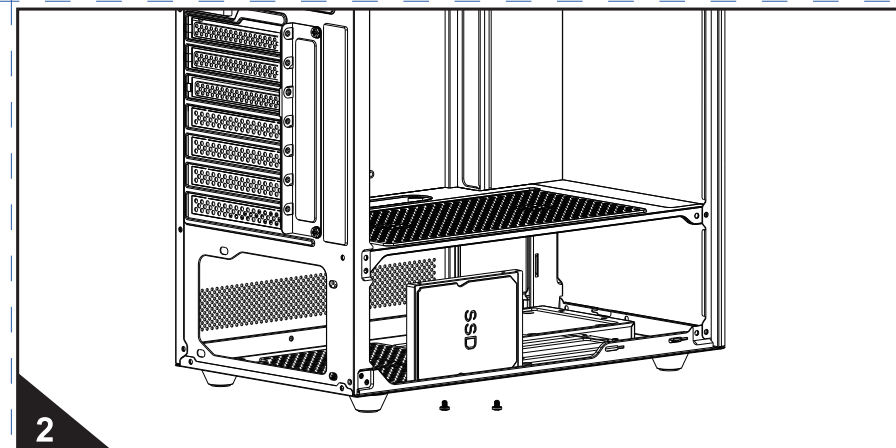

2 Mount a 2.5-inch SSD directly onto the chassis base as shown and secure it with two screws from the bottom.

7 Cooling Configurations

- Top Panel: 2×120mm fans or 1×240mm radiator
2×140mm fans

Divider Panel: 2×120mm fans

Rear Panel: 1×120mm fan or 1×120mm radiator

Front Panel: Fan support depends on panel design.